




Lease Life  
to Man-Made  
Structures

# SUPERSHIELD

## JOINTBELT

PVC Waterstops for Internal Construction Joints

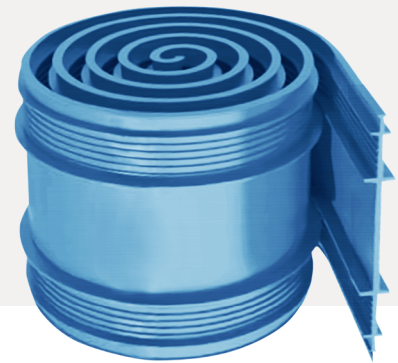

### PRODUCT DESCRIPTION

SUPERSHIELD JOINTBELT is a specially formulated polyvinyl chloride (PVC) waterstop designed to provide effective sealing of internal side of construction joint areas, ensuring durable waterproofing. It is resistant to harsh environments, aging, degradation, saltwater intrusion, UV radiation, and ozone exposure, as well as a wide array of chemicals and atmospheric agents commonly present in groundwater and air. It can accommodate joint movements while also preventing water from passing through them.

### AREAS OF APPLICATION

- Foundation Works
- Sewage Treatment Plants
- Tunnels
- Power Stations
- Bridges
- Water Treatment Plants
- Lock and Dam Systems
- Reservoirs and Aqueducts
- Flood Walls
- Potable Water Reservoirs
- Retaining Walls
- Containment Structures and Tanks
- Floor Slabs
- Parking Areas
- Industrial Buildings


## TECHNICAL DATA

### General Characteristics

PROPERTY	VALUE
Colour	Black / Blue
Density - ISO 1183	1.36 ± 0.03 g/cc

### Performance Characteristics

TEST NAME	TEST METHOD	PERFORMANCE
Shore A Hardness	ISO 868	72 ± 5
Tensile Strength	ISO 527	≥ 10 N/mm <sup>2</sup>
Elongation at break	ISO 527	≥ 300 %
Stiffening Temperature	ISO 458/2	-30°C
Inflammability	UL 94	Class V0



Product Variation	A [mm]	B [mm]	L [mm]
JOINTBELT 200	3.3	3.3	200
JOINTBELT 300	3.5	3.5	300



## APPLICATION GUIDELINES

### Application

During the concrete pouring process, SUPERSHIELD JOINTBELT is placed internally at construction joints, ensuring a secure seal. Steel fastening clips attach SUPERSHIELD JOINTBELT's fins to the concrete reinforcement, keeping it firmly in place during pouring and vibration. Alternatively, you can secure it with wire to avoid displacement during pouring or vibration-induced consolidation. For longer joint spans, two SUPERSHIELD JOINTBELT profiles can be connected using hot welding or specialized accessories (not included).

### Cutting and welding instructions:

For a successful weld, use either an electrical blade or a welding device with the correct cross-section. Begin by cutting the sections at a precise angle and meticulously removing any impurities or irregularities from the surfaces. Ensure the welding tool is clean and positioned securely before heating.

Position the welding components on a stable, level surface. Apply slight pressure to the cut surfaces against the heated welding tool until a liquid mass appears on both sides. Then, release the pressure carefully to remove the welding tool and press the seam together until it cools down, typically within 30–60 seconds.

It's best to have two people involved in this process for optimal results. While one person handles the welding tool, the other should assist by pressing the seams together. Move swiftly during welding, ensuring the heated points don't cool before they fully fuse. Excessive heating can cause PVC to char or result in inadequate bonding.

PVC melts between 120 and 140°C and burns between 160 and 180°C, so adjust the welding device's temperature accordingly.

### HEALTH AND SAFETY

No special measures required. For further instructions on a safe use of the product please refer to safety datasheets.

### STORAGE

Store in dry conditions, protected from heat, frost and direct sunlight.

### PACKAGING

SUPERSHIELD JOINTBELT 200 - 25m Rolls.

SUPERSHIELD JOINTBELT 300 - 25m Rolls.

### WARRANTY

Supershield warrants that its products will be free from material defects and will comply with the specifications provided in their respective technical data sheets. If any product is proven to be defective, Supershield's liability will be limited to the replacement of the product. Supershield will not be liable for any incidental or consequential damages. No other warranties, express or implied, shall apply, including warranties of merchantability or fitness for a particular purpose. It is the user's responsibility to determine the suitability of the product for their intended use and to assume all risks and liabilities associated with its application. Supershield reserves the right to alter the properties of its products without prior notice.